

Nominal Capacity ^{*1}	5000mAh
Nominal Voltage	3V
Standard Discharge Current	1.0mA
Max. Discharge Current	Continuous ^{*2} Pulse ^{*3}
	10mA 200mA
Temperature Range	-40°C ~ 85°C
Weight	42g
Dimensions	D 23.0mm H 50.0mm d 7mm


*1 Nominal capacity is determined to an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at 23°C.

*2 Current value is determined to be the level at which 50% of the nominal capacity is obtained with an end voltage of 2.0V at 23 °C.


*3 Current value for obtaining 2.0V cell voltage when pulse is applied for 15seconds at 50% discharge depth at 23 °C.

Typical Characteristics


Discharge Characteristics of CR23500SE

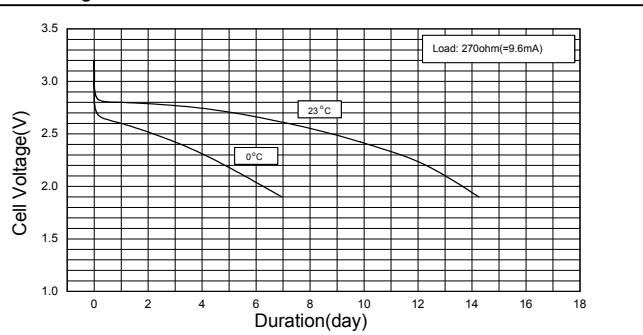


Discharge Characteristics of CR23500SE

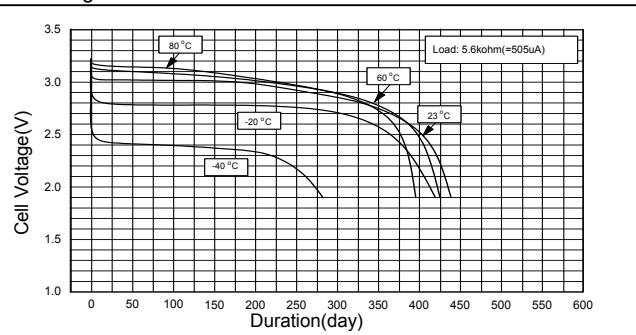


Discharge Characteristics of CR23500SE

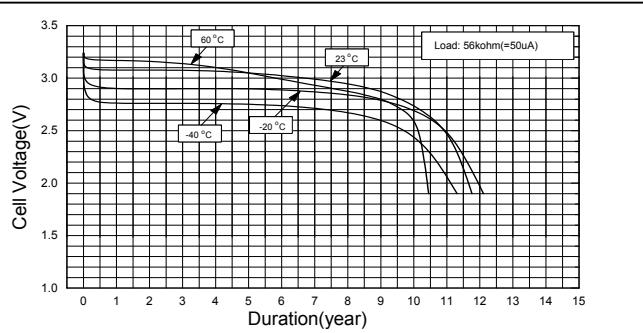

Discharge Load vs. Capacity of CR23500SE

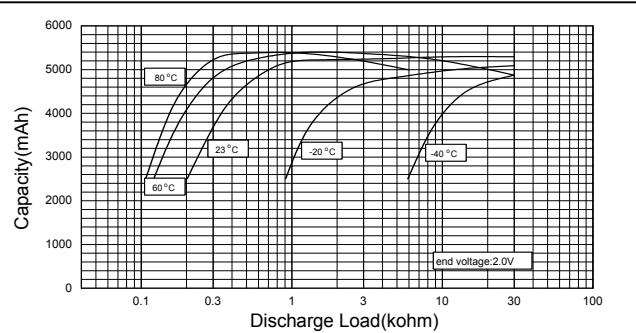

Discharge Load vs. Operating Voltage of CR23500SE

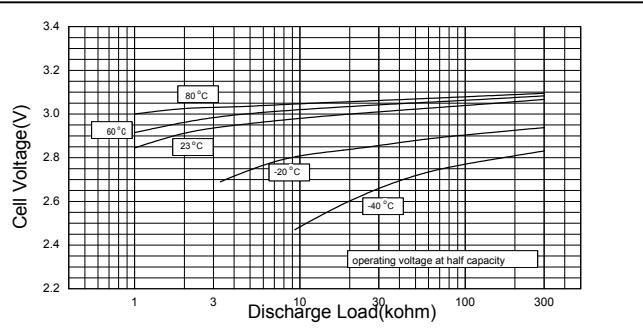

Discharge Characteristics of CR23500SE

